

Product: **Underground Wire Locator Kit**

Images: for more images -
[view product page on our site](#)



SKU: HP-TRACK-NF816

Description: Underground Network Wire Tracker Kit
Locating & tracking buried and hidden wires – Underground or in-wall wires
Determining Which Receptacles are on specific circuits.
Pinpointing Drill Sites before drilling.
Detecting range is 3 feet and cable length 3000 feet
Widely applied in pet fence
White LED Flash Light.

Specifications:


NF-806 Transmitter specifications	
Tone frequency:	200kHz
Max. length distance (m):	500 (1640 feet)
Max. depth distance (cm):	50 (20")
Max. working current:	≤ 70mA
Tone mode:	1 Tone
Max. signal voltage:	15Vp-p
LED lights display:	White LED Flash Light
Voltage protection:	AC 60V/DC 42V
Battery Type:	DC9.0V (NEDA 1604/6F22) x 1pc
Dimensions (mm):	L 49 × W 135 × D 33
NF-806 Receiver specifications	
Frequency:	200kHz
The Max. working current:	≤ 70mA
Earphone jack:	1
Battery Type:	DC9.0V (NEDA 1604/6F22) x1pc
Dimensions (mm):	L 43 × W 168 × D 27

Attntion:

Do not connected high voltage lines to avoid buring out the machine
Put into the right place to avoid hurting other, because of the sharp part
Connected the cable to the right port
Read the user manual before use it

included:

- NF-816 Transmitter x 1
- NF-816 Receiver x 1
- Earphone x 1
- DC9.0V Battery x 2
- Case x 1
- User manual

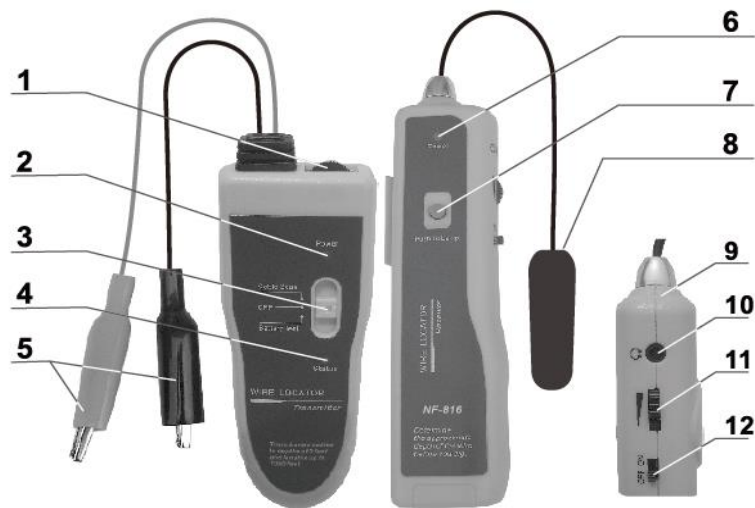

1	Thumb Wheel Switch	7	Push For Light Button
2	Transmitter LED	6	Antenna
3	Transmitter Switch	9	LED Flash Light
4	Status LED	10	Earphone Jack
5	Alligator Clips & Leads	11	Thumb Wheel Switch
6	Receiver LED	12	ON/OFF Switch